BILL OF MATERIAL

FABRICATION MATERIALS


PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	PIPE			
1	PIPE B-36.19 BE SEAMLESS 40S	2	PI3D217Z00913ZZZZ	5.9M
2	PIPE B-36.19 PE SEAMLESS 80S	3/4	PI3D277Z00514ZZZZ	0.1M
	FITTINGS			
3	T.EQUAL B-16.9 BW 40S	2 x 2	WEGC84ZZ00913ZZZZ	2
4	WELDOLET MSS-SP97 BW 40S 80S	2 x 3/4	YWSAF4ZZ009130514	1
5	ELBOW.90 B-16.9 BW 1.5D 40S	2	WAGC84Z10913ZZZZ	4
6	FLNG.FIG.8 ASME-B16.48 150 FF/125AARH	2	FGKG521Z009ZZZZZZ	1
	FLANGES			
7	FLNG.WN B-16.5 150 RF/125AARH 40S	2	FWCG527Z00913ZZZZ	3
8	FLNG.WN B-16.5 150 RF/125AARH 80S	3/4	FWCG527Z00514ZZZZ	1
9	FLNG.BLIND B-16.5 150 RF/125AARH	3/4	FBCG527Z005ZZZZZZ	1

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	GASKETS			
10	GASKET B-16.20-ANSI B16.5 SPIRAL 150	2	GK6CF72Z009ZZZZZZ	4
11	GASKET B-16.20-ANSI B16.5 SPIRAL 150	3/4	GK6CF72Z005ZZZZZZ	2
	BOLTS			
12	95 MM LONG BOLT.STUD WITH 2 NUTS B-18.2 A193 GR.B7(HDG)/ A194 GR.2H(HDG)	5/8		4
13	83 MM LONG BOLT.STUD WITH 2 NUTS B-18.2 A193 GR.B7(HDG)/ A194 GR.2H(HDG)	5/8		8
14	64 MM LONG BOLT.STUD WITH 2 NUTS B-18.2 A193 GR.B7(HDG)/ A194 GR.2H(HDG)	1/2		8
	VALVES / IN-LINE ITEMS			
15	VLV.BALL SHEET 543DR	2	543DRZZZ009ZZZZZZ	1
16	VLV.GATE LOCK OPEN SHEET 513DR	3/4	513DRZZZ0051ZZZZZ	1

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	N.S. (INS)	PIECE NO	CUT LENGTH	N.S. (INS)
<9>	2712	2	<10>	273	2
<11>	480	2	<12>	974	2
<13>	220	2	<14>	100	3/4
<15>	1101	2	<16>	100	2

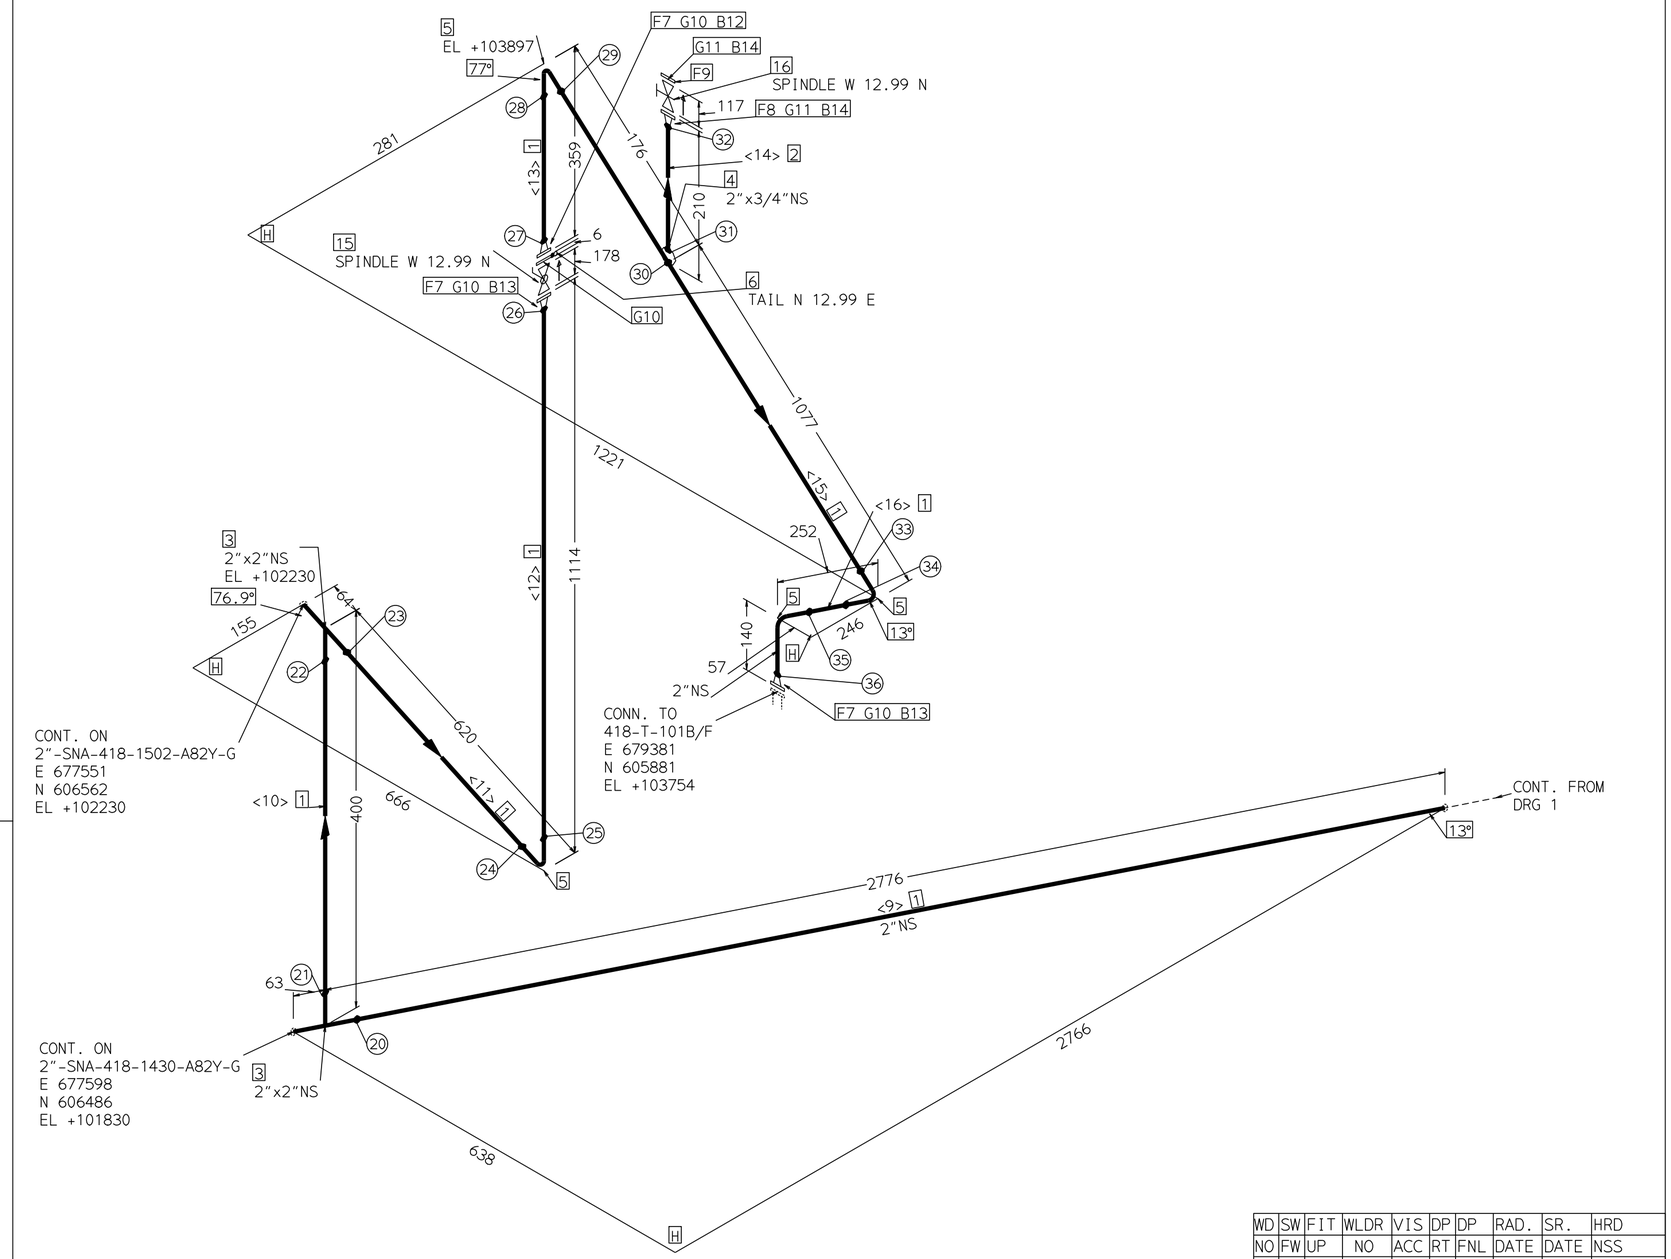

WD NO	SW FW	FIT UP	WLDR NO	VIS ACC	DP RT	DP FNL	RAD. DATE	SR. DATE	HRD NSS
20	S								
21	S								
22	S								
23	S								
24	S								
25	S								
26	S								
27	S								
28	S								
29	S								
30	S								
31	S								
32	S								
33	S								
34	S								
35	S								
36	S								

INCHDIA: 68

INCHMETER: 49.65

CONSULTANT: **ENGINEERS INDIA LIMITED**
NEW DELHI

CLIENT: **MUNITIONS INDIA LIMITED**
HEF KHADKI-PUNE, INDIA

FILE: AFCIS075A2

CUMULATIVE CENTER LINE CURVILINEAR LENGTHS (INCLD. VALVES)
PIPE NS (INS):3/4 2
CL LENGTH (M):0.6 25.2

30/04/2026

NO.	DATE	REVISIONS	BY	CHK	MTR	STR	APPVD

PROJECT NAME : MIL PROJECT
TNT PLANT, HEF KHADKI PUNE,
INDIA.

UNIT NAME : SNA,WNA & OLEUM TANKS

JOB NO : B889 | ZONE : G

LINE NUMBER | REV

2"-SNA-418-1501-A82Y-G | -1

UNIT : 418A SHEET:2 / 2

This drawing and the design it covers are the property of ENGINEERS INDIA LIMITED. They are merely loaned and on the borrowers expressed agreement that they will not be produced, copied, loaned, exhibited nor used except in the limited way and private use permitted by any written consent given by the lender to the borrower.